

**LS och LE series**

**MILAMA**



LEB



LSB

**Ultrasonic washers,  
table sized**

# Table size LS och LE

## Standard equipment:

Stainless steel machine.  
 Basket and lid as accessories.  
 Machine adapted for water-based alkaline liquid.  
 LS machine with welded tank, i.e. 90° corners.  
 LE machine with deep drawn tank, rounded corners.

Table sized machine for connection to 230V/50Hz.  
 Electrical heating of machine controlled through thermostat.  
 Valve for emptying tank.  
 Frequency 30kHz ±5%.



LS


## Technical data table sized machines LS (welded tank):

	<b>LS60</b>	<b>LS90</b>	<b>LS120</b>	<b>LS270</b>	<b>LS280</b>	<b>LS400</b>
Tank volume	2 liter	9 liter	12 liter	27 liter	28 liter	40 liter
External measurements (BxDxH)	380x240x320	475x260x320	420x280x385	420x380x475	625x380x375	520x330x575
Tank measurements (BxDxH)	260x160x145	355x180x150	300x200x210	300x300x300	505x300x200	400x250x400
Basket measurements (BxDxH)	220x120x100	315x140x100	260x160x170	260x260x250	465x260x150	360x210x340
Ultrasonic effect	120/240W	180/360W	240/480W	360/720W	360/720W	480/960W
Number of transductors	2	3	4	6	6	8
Electrical heating	360W	520W	800W	1000W	1000W	2000W
Connection	230V/50Hz/10A	230V/50Hz/10A	230V/50Hz/10A	230V/50Hz/10A	230V/50Hz/10A	230V/50Hz/16A

<b>Accessories</b>	<b>LS60</b>	<b>LS90</b>	<b>LS120</b>	<b>LS270</b>	<b>LS280</b>	<b>LS400</b>
Timer	Included	Included	Included	Included	Included	Included
Basket in stainless steel	Included	Included	Included	Optional	Optional	Optional
Lid	Included	Included	Included	Optional	Optional	Optional
Digital panel	Optional	Optional	Optional	Optional	Optional	Optional



LE

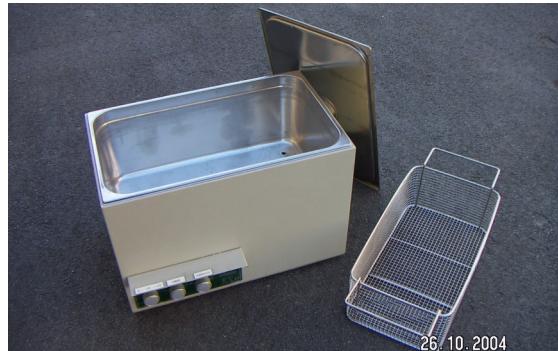

26/10.2004

## Technical data deep drawn table machines LE (deep drawn tank):

	<b>LE30</b>	<b>LE60</b>	<b>LE120</b>	<b>LE180</b>	<b>LE280</b>
Tank volume	3 liter	6 liter	12 liter	18 liter	28 liter
External measurements (BxDxH)	300x175x270	370x190x270	370x280x320	397x340x320	575x340x320
Tank measurements (BxDxH)	230x135x110	300x151x150	300x240x200	327x300x200	505x300x200
Basket measurements (BxDxH)	190x95x70	260x110x100	260x200x150	280x260x150	465x260x150
Ultrasonic effect	95/190W	95/190W	150/300W	175/350W	250/500W
Number of transductors	2	2	3	4	4
Electrical heating	600W	600W	800W	800W	800W
Connection	230V/50Hz/10A	230V/50Hz/10A	230V/50Hz/10A	230V/50Hz/10A	230V/50Hz/10A

<b>Accessories</b>	<b>LE30</b>	<b>LE60</b>	<b>LE120</b>	<b>LE180</b>	<b>LE280</b>
Timer	Included	Included	Included	Included	Included
Basket in stainless steel	Optional	Optional	Optional	Optional	Optional
Lid	Optional	Optional	Optional	Optional	Optional
Digital panel	Optional	Optional	Optional	Optional	Optional

**MILAMA**

Traktorvägen 12  
SE 226 60 Lund  
SWEDEN

Tel: +46 46 149740  
info@milama.se  
www.milama.se

2018 03 01